
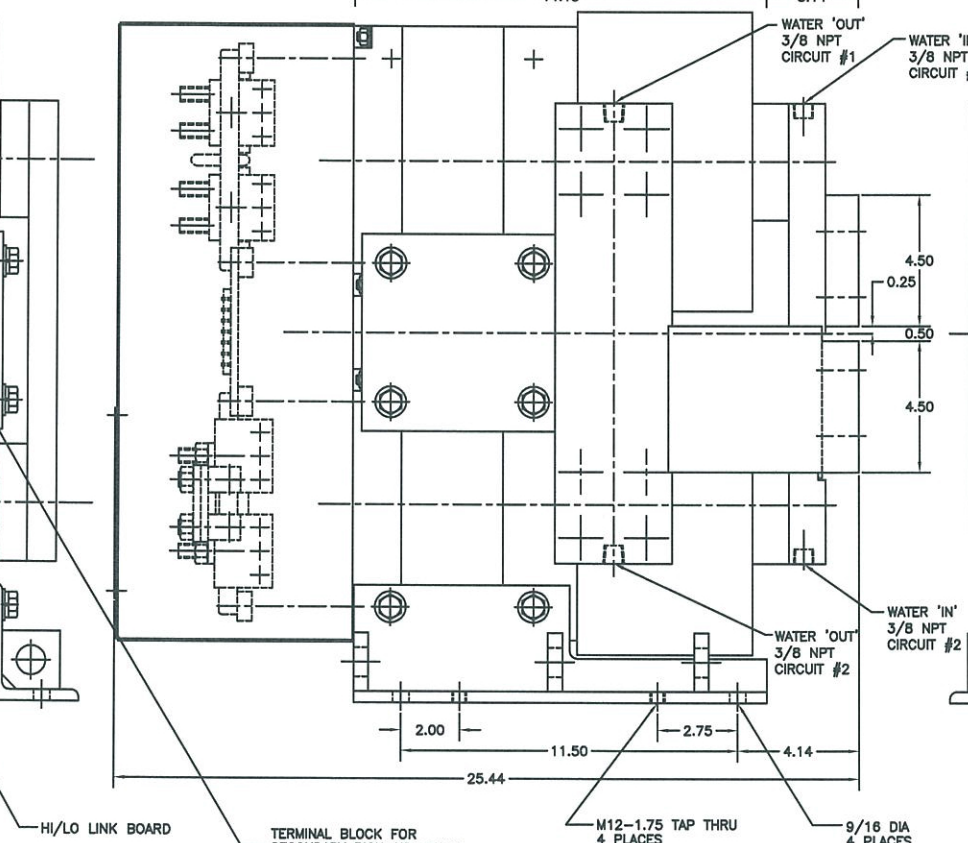


5547-1

The secondary terminals of this device are intended as an electrical connection only. Applications must be designed to minimize any forces applied to the secondary terminals, this can be accomplished by transferring forces to a structural member.

COOLING REQUIREMENTS: 4 GPM @ 30°C PER CURCUIT
8 GPM TOTAL

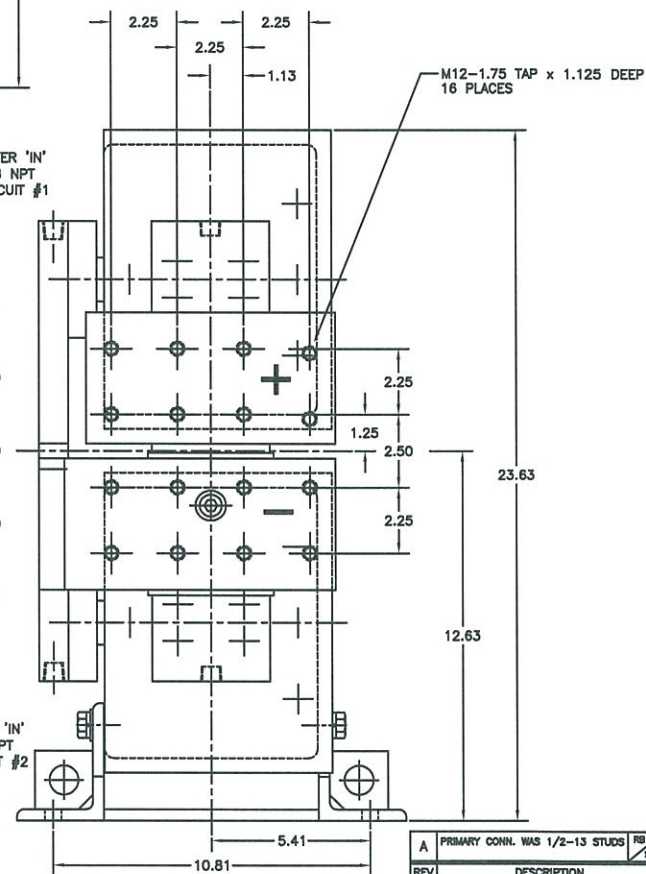

A	PRIMARY CONN. WAS 1/2-13 STUDS	RS	SFR	17Jan05
REV	DESCRIPTION	DATE		
FOR THE RECORD, THE INFORMATION IS REPRODUCED BY AN EXCLUSIVE CONTRACTOR AND PROVIDED TO THE USER FOR HIS OR HER OWNING COMPANY'S USE ONLY. THE INFORMATION IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF THE ORIGINAL AND FINAL DESIGNER. THE USER AGREES TO HOLD THE ORIGINAL AND FINAL DESIGNER HARMLESS FROM AND AGAINST ALL SUCH REPRODUCTION OR TRANSMISSION OF THE INFORMATION. THE USER AGREES TO HOLD THE ORIGINAL AND FINAL DESIGNER HARMLESS FROM AND AGAINST ALL SUCH REPRODUCTION OR TRANSMISSION OF THE INFORMATION.				
BUILD	NONE	DESIGN BY		RS
DRAWN	16Dec04	REVISION		
				
DC POWER SUPPLY				
UNIVERSITY				5547-1