


TAP	PRIMARY TURNS	SECONDARY TURNS	SECONDARY VOLTS	PRIMARY CURRENT	SECONDARY CURRENT	KVA
1	55	5	43.6	229.2	2521	110
2	50	5	48.0	229.2	2292	110
3	45	5	53.3	229.2	2063	110

MODEL NUMBER	KVA @ 100% DUTY CYCLE	PRIMARY VOLTS/FREQ	SECONDARY VOLTS	TURNS RATIO	STEPS	APPROX. WEIGHT
B486110X8187LX	110	480V/60Hz	43.6 - 53.3	55:5 - 45:5	3	448 LBS [204 KG]

COOLING REQUIREMENTS: 1 GPM [3.8 LPM] MIN @ 30°C MAX INLET TEMPERATURE

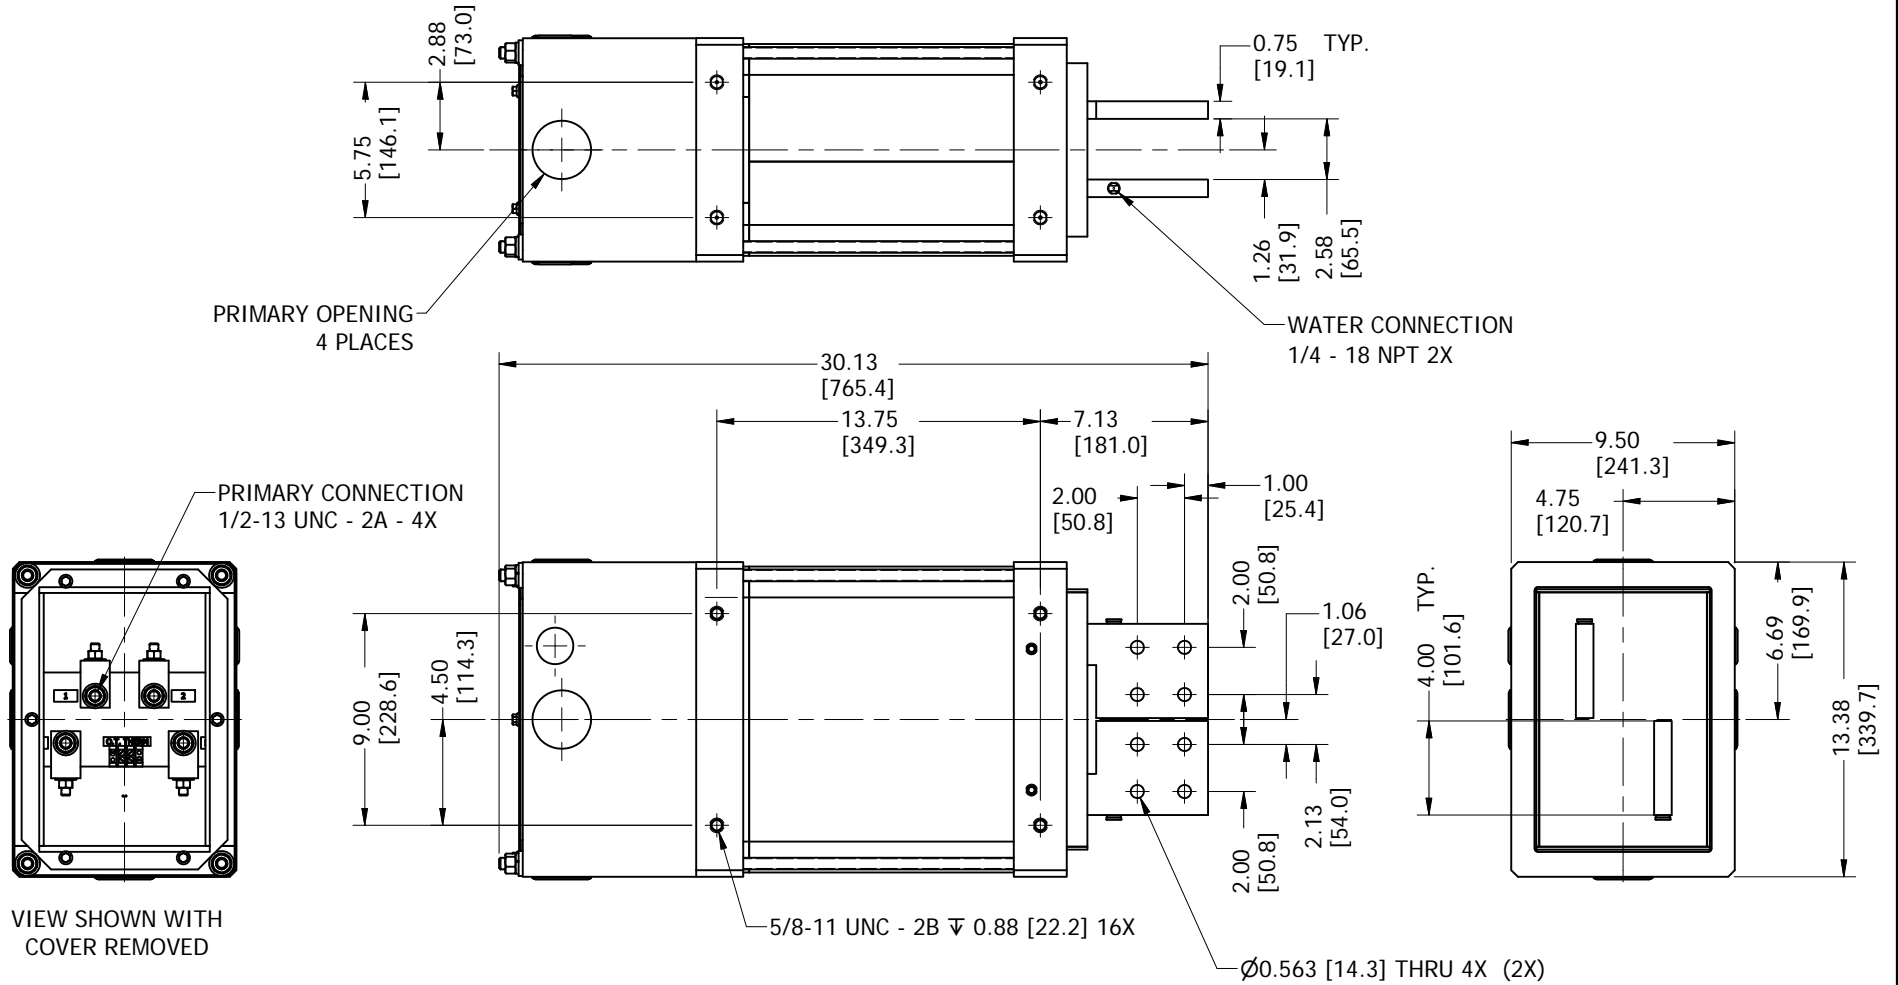

VIEW SHOWN WITH COVER REMOVED

DIMENSIONS: IN [MM]

REV	DESCRIPTION	DATE
<small>© 2018 Copyright RoMan Manufacturing. THIS DRAWING AND ALL THE INFORMATION AND TECHNOLOGY IN IT ARE EXCLUSIVE, CONFIDENTIAL AND PROPRIETARY TO RoMan MANUFACTURING, INC. THIS DRAWING IS OWNED BY RoMan MANUFACTURING, INC., AND UNLESS SPECIFICALLY AUTHORIZED IN WRITING, NO COPIES SHALL BE MADE OF THIS DRAWING, AND SHALL BE USED ONLY FOR THE LIMITED PURPOSE FOR WHICH IT IS DISCLOSED AND ONLY TO THE BENEFIT OF RoMan MANUFACTURING, INC. AND IT AND ANY COPIES, AUTHORIZED OR NOT, SHALL BE IMMEDIATELY RETURNED UPON ANY REQUEST THEREFORE.</small>		
SCALE:	NONE	DETAILER: bconner
DATE:	6/5/2018	DESIGNER: bconner
		APPROX. WEIGHT: 447.5 lbmass
<b>TRANSFORMER ASSY</b>		
		DRAWING NUMBER: 8187-1